


TP-Link Archer C5 AC1200

1. Internetinio adreso lauke įveskite 192.168.0.1 (jei nebuvo pakeista kitokiu);



2. į abu laukelius „User Name“ ir „Password“ įveskite žodį **admin**. Pateksite į maršruto parinktuvo nustatymus;

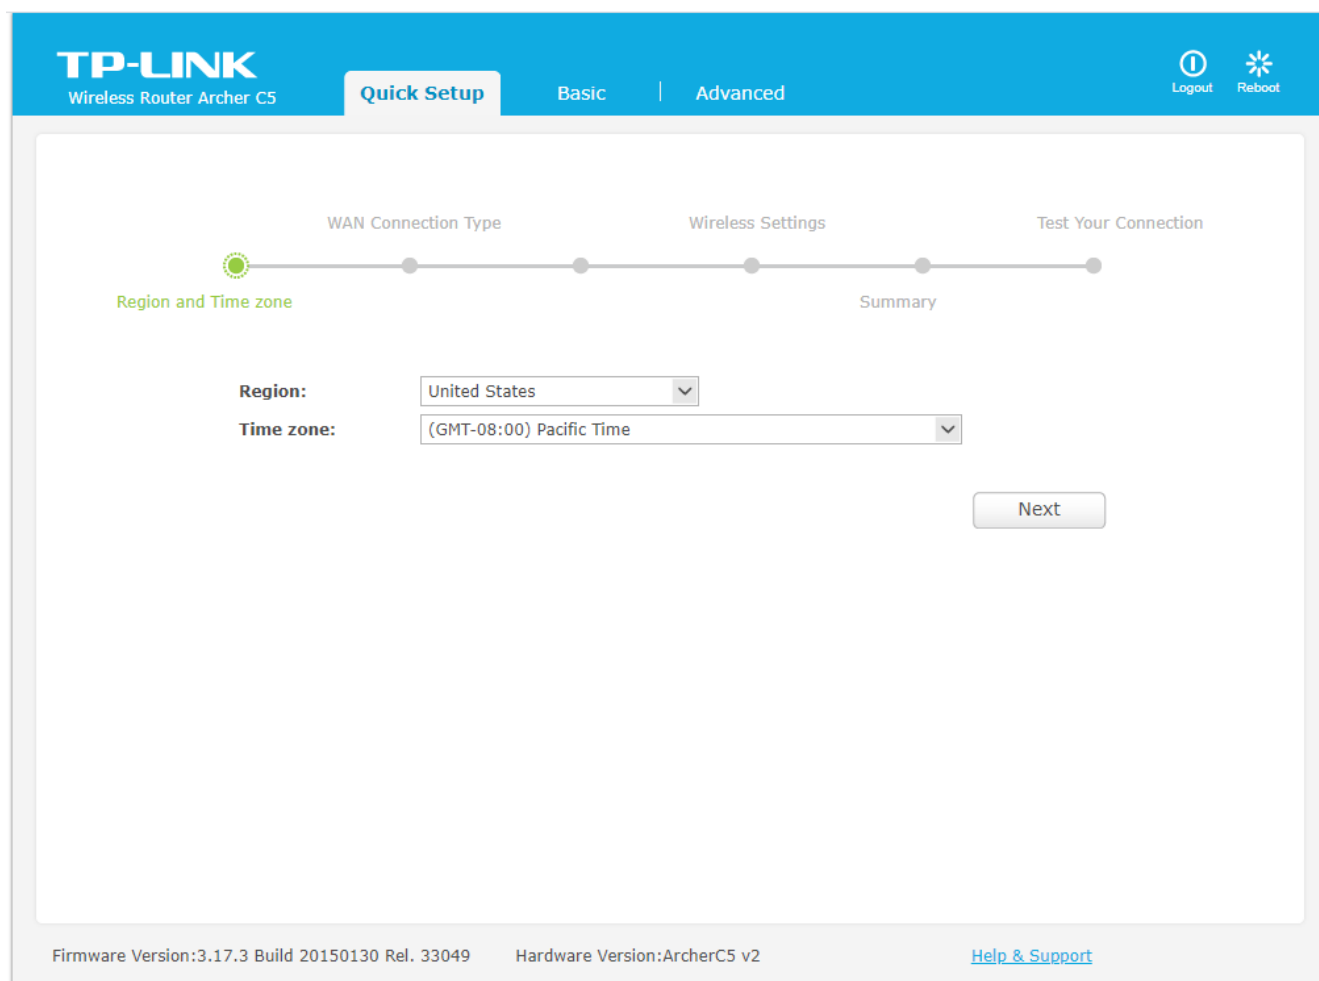

TP-LINK
Wireless Router Archer C5

Quick Setup | Basic | Advanced

Logout | Reboot

WAN Connection Type | Wireless Settings | Test Your Connection

Region and Time zone | Summary

Region:

Time zone:

Next

Firmware Version:3.17.3 Build 20150130 Rel. 33049 | Hardware Version:ArcherC5 v2 | [Help & Support](#)

3. pasirinkite viršuje esančią skiltį „Advanced“;

The screenshot shows the TP-Link Archer C5 router's web interface. The top navigation bar includes 'Quick Setup', 'Basic', and 'Advanced' (selected). The left sidebar lists various settings categories. The main content area is titled 'Status' and displays the following information:

- Status**
 - Firmware Version: 3.17.3 Build 20150130 Rel. 33049
 - Hardware Version: ArcherC5 v2
- LAN**
 - MAC Address: 00-0A-EB-13-7B-00
 - IP Address: 192.168.0.1
 - Subnet Mask: 255.255.255.0
- Wireless 2.4GHz**
 - Wireless Radio: Enable
 - Name (SSID): TP-LINK_2.4GHz_137AFF
 - Mode: 11bgn mixed
 - Channel: Auto (Current channel 0)
 - Channel Width: Automatic
 - MAC Address: 00-0A-EB-13-7A-FF
 - WDS Status: Disable
- Wireless 5GHz**
 - Wireless Radio: Enable
 - Name (SSID): TP-LINK_5GHz_137AFE
 - Mode: 11a/n/ac mixed
 - Channel: Auto (Current channel 0)
 - Channel Width: Automatic
 - MAC Address: 00-0A-EB-13-7A-FE
 - WDS Status: Disable

4. kairėje meniu pusėje pasirinkite „Wireless 2.4GHz“;

The screenshot shows the TP-Link Archer C5 router's web interface with the 'Wireless 2.4GHz' settings page selected. The left sidebar shows 'Wireless 2.4GHz' expanded with sub-items: 'Wireless Settings', 'WPS', 'Wireless Security', 'Wireless MAC Filtering', 'Wireless Advanced', and 'Wireless Statistics'. The main content area displays the same status information as the previous screenshot, but with the 'Wireless 2.4GHz' section highlighted.

5. pasirinkite „Wireless Security“;

TP-LINK
Wireless Router Archer C5

Quick Setup | Basic | **Advanced** | Logout | Reboot

- Status
- Network
- Dual Band Selection
- Wireless 2.4GHz**
 - Wireless Settings
 - WPS
 - Wireless Security**
 - Wireless MAC Filtering
 - Wireless Advanced

Wireless Security

Disable Security

WPA/WPA2 - Personal(Recommended)

Version: WPA2-PSK

Encryption: AES

Wireless Password: 12345670
(You can enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

Group Key Update Period: 0 Seconds (Keep it default if you are not sure, minimum is 30, 0 means no update)

6. nustatykite „WPA/WPA2 – Personal (Recommended)“;

7. laukelyje „Wireless Password“ įrašykite savo sugalvotą slaptažodį. Paspauskite „Save“;

Wireless Security

Disable Security

WPA/WPA2 - Personal(Recommended)

Version: WPA2-PSK

Encryption: AES

Wireless Password: 11001102
(You can enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

Group Key Update Period: 0 Seconds (Keep it default if you are not sure, minimum is 30, 0 means no update)

WPA/WPA2 - Enterprise

Version: Automatic

Encryption: Automatic

Radius Server IP:

Radius Port: 1812 (1-65535, 0 stands for default port 1812)

Radius Password:

Group Key Update Period: 0 (in second, minimum is 30, 0 means no update)

WEP


Type: Automatic

WEP Key Format: ASCII


Key Selected	WEP Key	Key Type
Key 1: <input checked="" type="radio"/>		Disabled
Key 2: <input type="radio"/>		Disabled
Key 3: <input type="radio"/>		Disabled
Key 4: <input type="radio"/>		Disabled

Save

8. kairėje meniu pusėje pasirinkite „Wireless 5Ghz“;

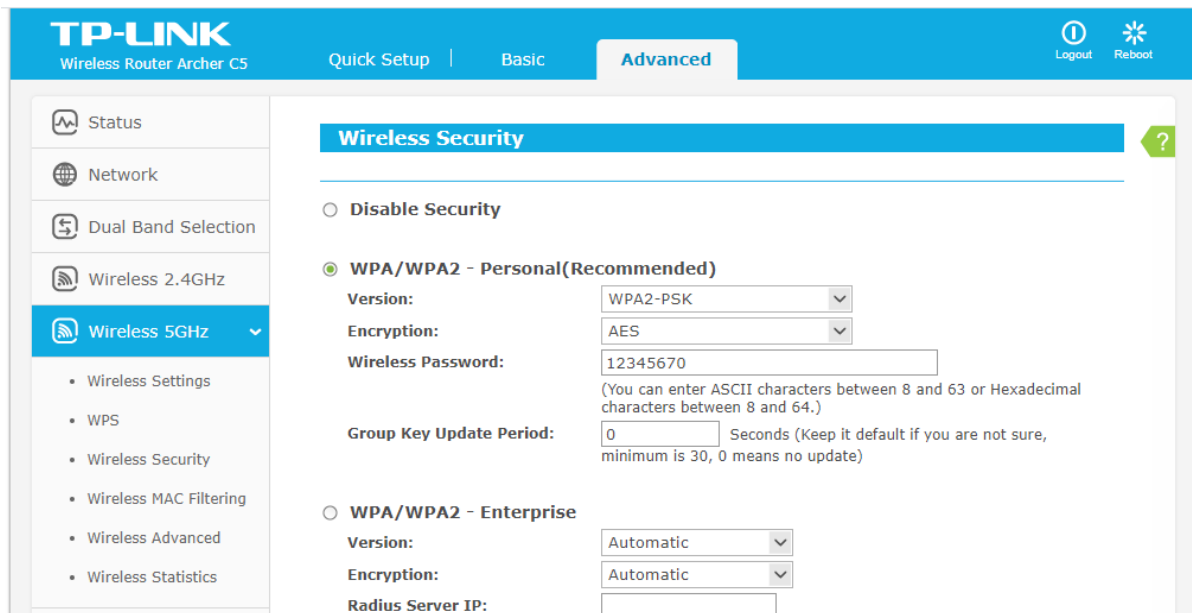

9. pasirinkite „Wireless Security“;

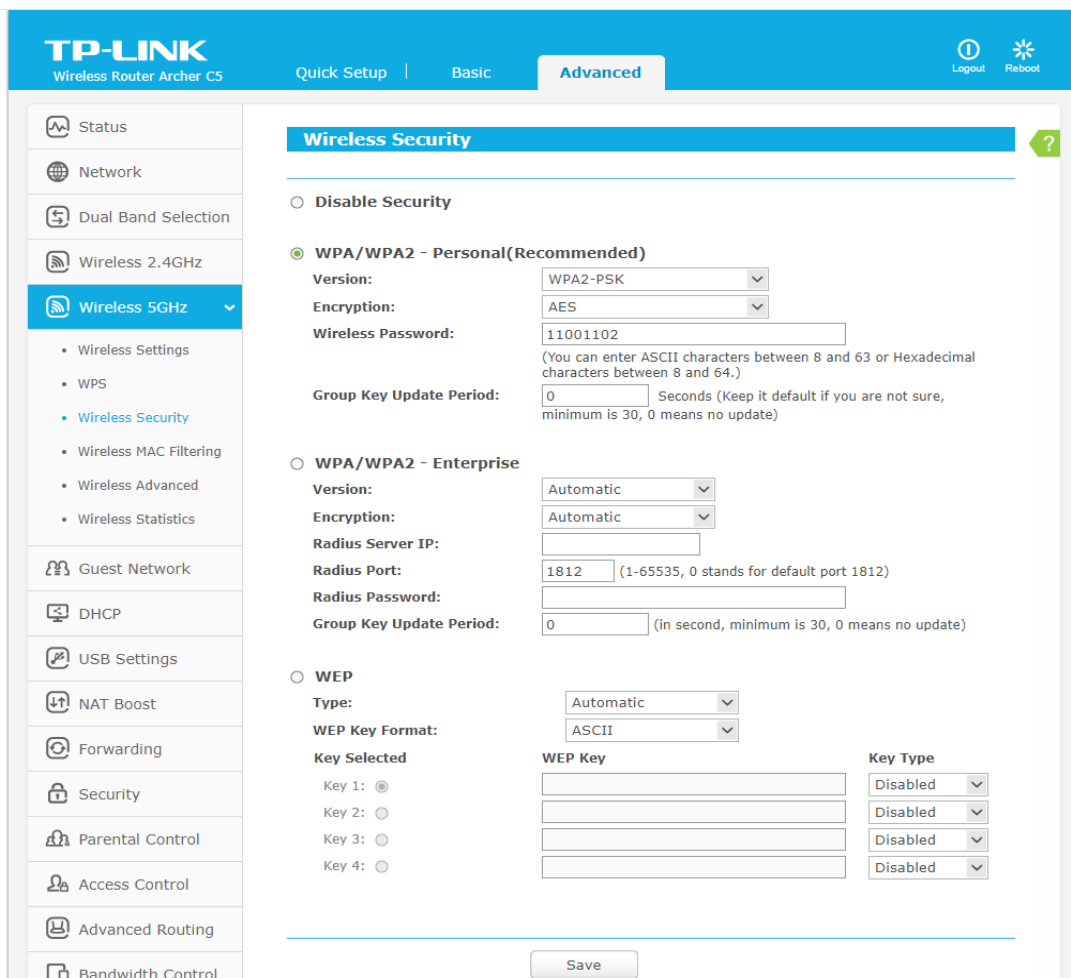

11. nustatykite „WPA/WPA2 – Personal (Recommended)“;

12. laukelyje „Wireless Password“ įrašykite savo sugalvotą slaptažodį. Paspauskite „Save“;

Wireless Security



Disable Security

WPA/WPA2 - Personal(Recommended)

Version:

Encryption:

Wireless Password:

(You can enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

Group Key Update Period: Seconds (Keep it default if you are not sure, minimum is 30, 0 means no update)

WPA/WPA2 - Enterprise

Version:

Encryption:

Radius Server IP:

Radius Port: (1-65535, 0 stands for default port 1812)

Radius Password:

Group Key Update Period: (in second, minimum is 30, 0 means no update)

WEP

Type:

WEP Key Format:

Key Selected

Key 1:

Key 2:

Key 3:

Key 4:

WEP Key

<input type="text"/>
<input type="text"/>
<input type="text"/>
<input type="text"/>

Key Type

<input type="text" value="Disabled"/>
<input type="text" value="Disabled"/>
<input type="text" value="Disabled"/>
<input type="text" value="Disabled"/>

13. perkraukite maršruto parinktuvą (atjunkite maitinimo blokelį).