


TP-Link N750 TL-WDR4300

1. Internetinio adreso lauke įveskite 192.168.0.1 (jei nebuvo pakeista kitokiu);



2. į abu laukelius „User Name“ ir „Password“ įveskite žodį **admin**. Pateksite į maršruto parinktuvo nustatymus;

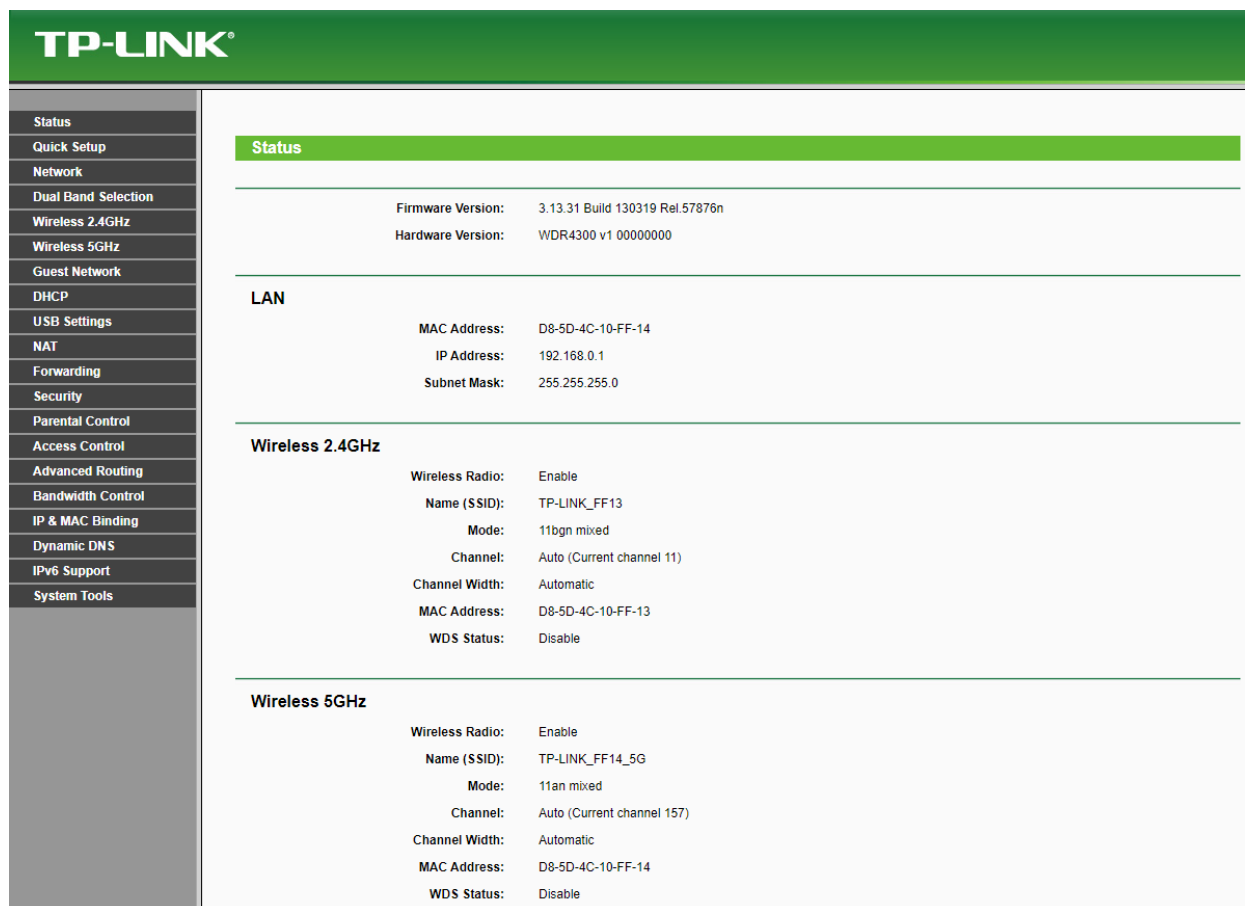

TP-LINK

- Status
- Quick Setup
- Network
- Dual Band Selection
- Wireless 2.4GHz
- Wireless 5GHz
- Guest Network
- DHCP
- USB Settings
- NAT
- Forwarding
- Security
- Parental Control
- Access Control
- Advanced Routing
- Bandwidth Control
- IP & MAC Binding
- Dynamic DNS
- IPv6 Support
- System Tools

Status

Firmware Version: 3.13.31 Build 130319 Rel.57876n
Hardware Version: WDR4300 v1 00000000

LAN

MAC Address: D8-5D-4C-10-FF-14
IP Address: 192.168.0.1
Subnet Mask: 255.255.255.0


Wireless 2.4GHz

Wireless Radio: Enable
Name (SSID): TP-LINK_FF13
Mode: 11bgn mixed
Channel: Auto (Current channel 11)
Channel Width: Automatic
MAC Address: D8-5D-4C-10-FF-13
WDS Status: Disable

Wireless 5GHz

Wireless Radio: Enable
Name (SSID): TP-LINK_FF14_5G
Mode: 11an mixed
Channel: Auto (Current channel 157)
Channel Width: Automatic
MAC Address: D8-5D-4C-10-FF-14
WDS Status: Disable

3. kairėje meniu pusėje pasirinkite „Wireless 2.4Ghz“;

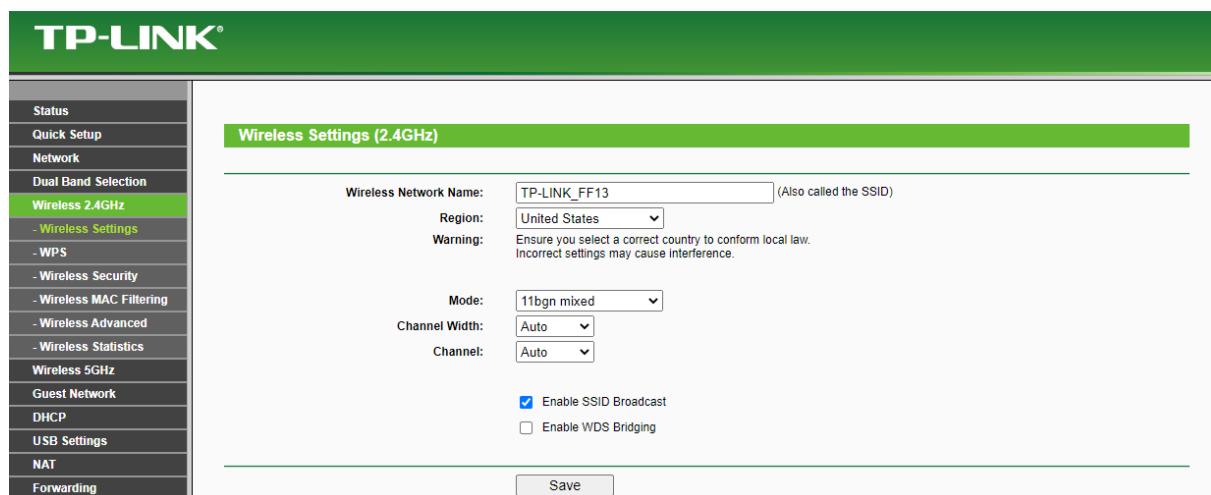

TP-LINK

- Status
- Quick Setup
- Network
- Dual Band Selection
- Wireless 2.4GHz
- Wireless 5GHz
- Guest Network
- DHCP
- USB Settings
- NAT
- Forwarding

Wireless Settings (2.4GHz)

Wireless Network Name: (Also called the SSID)
Region:
Warning: Ensure you select a correct country to conform local law. Incorrect settings may cause interference.
Mode:
Channel Width:
Channel:
 Enable SSID Broadcast
 Enable WDS Bridging

4. pasirinkite „Wireless security“;

TP-LINK

Wireless Security

Disable Security

WPA/WPA2 - Personal(Recommended)

Version:

Encryption:

PSK Password:
(You can enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

Group Key Update Period: Seconds (Keep it default if you are not sure, minimum is 30, 0 means no update)

WPA/WPA2 - Enterprise

Version:

Encryption:

Radius Server IP:

Radius Port: (1-65535, 0 stands for default port 1812)

Radius Password:

Group Key Update Period: (in second, minimum is 30, 0 means no update)

WEP

Type:

WEP Key Format:

Key Selected	WEP Key (Password)	Key Type
Key 1: <input checked="" type="radio"/>	<input type="text"/>	Disabled ▾
Key 2: <input type="radio"/>	<input type="text"/>	Disabled ▾
Key 3: <input type="radio"/>	<input type="text"/>	Disabled ▾
Key 4: <input type="radio"/>	<input type="text"/>	Disabled ▾

5. atsidariusiame lange pasirinkite „WPA/WPA2 – Personal (Recommended)“;

6. laukelyje „PSK Password“ įrašykite savo sugalvotą slaptažodį. Paspauskite „Save“;

Wireless Security

Disable Security

WPA/WPA2 - Personal(Recommended)

Version:

Encryption:

PSK Password:

(You can enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

Group Key Update Period: Seconds (Keep it default if you are not sure, minimum is 30, 0 means no update)

WPA/WPA2 - Enterprise

Version:

Encryption:

Radius Server IP:

Radius Port: (1-65535, 0 stands for default port 1812)

Radius Password:

Group Key Update Period: (in second, minimum is 30, 0 means no update)

WEP

Type:

WEP Key Format:

Key Selected	WEP Key (Password)	Key Type
Key 1: <input checked="" type="radio"/>	<input type="text"/>	<input type="text" value="Disabled"/>
Key 2: <input type="radio"/>	<input type="text"/>	<input type="text" value="Disabled"/>
Key 3: <input type="radio"/>	<input type="text"/>	<input type="text" value="Disabled"/>
Key 4: <input type="radio"/>	<input type="text"/>	<input type="text" value="Disabled"/>

7. pasirinkite „Wireless 5GHz“;

TP-LINK

Wireless Settings (5GHz)

Wireless Network Name: (Also called the SSID)

Region:

Warning: Ensure you select a correct country to conform local law. Incorrect settings may cause interference.

Mode:

Channel Width:

Channel:

Enable SSID Broadcast

Enable WDS Bridging

8. pasirenkite „Wireless security“;

TP-LINK

Wireless Security

Disable Security

WPA/WPA2 - Personal(Recommended)

Version:

Encryption:

PSK Password:

(You can enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

Group Key Update Period: Seconds (Keep it default if you are not sure, minimum is 30, 0 means no update)

WPA/WPA2 - Enterprise

Version:

Encryption:

Radius Server IP:

Radius Port: (1-65535, 0 stands for default port 1812)

Radius Password:

Group Key Update Period: (in second, minimum is 30, 0 means no update)

WEP

Type:

WEP Key Format:

Key Selected	WEP Key (Password)	Key Type
Key 1: <input checked="" type="radio"/>	<input type="text"/>	<input type="text" value="Disabled"/>
Key 2: <input type="radio"/>	<input type="text"/>	<input type="text" value="Disabled"/>
Key 3: <input type="radio"/>	<input type="text"/>	<input type="text" value="Disabled"/>
Key 4: <input type="radio"/>	<input type="text"/>	<input type="text" value="Disabled"/>

9. atsidariusiame lange pasirinkite „WPA/WPA2 – Personal (Recommended)“;

10. laukelyje „PSK Password“ įrašykite savo sugalvotą slaptažodį. Paspauskite „Save“;

Wireless Security

Disable Security

WPA/WPA2 - Personal(Recommended)

Version: Automatic(Recommended) ▼

Encryption: AES ▼

PSK Password: tplinkpassword

(You can enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)

Group Key Update Period: 0 Seconds (Keep it default if you are not sure, minimum is 30, 0 means no update)

WPA/WPA2 - Enterprise

Version: Automatic ▼

Encryption: Automatic ▼

Radius Server IP:

Radius Port: 1812 (1-65535, 0 stands for default port 1812)

Radius Password:

Group Key Update Period: 0 (in second, minimum is 30, 0 means no update)

WEP

Type: Automatic ▼

WEP Key Format: Hexadecimal ▼

Key Selected	WEP Key (Password)	Key Type
Key 1: <input type="radio"/>	<input type="text"/>	Disabled ▼
Key 2: <input type="radio"/>	<input type="text"/>	Disabled ▼
Key 3: <input type="radio"/>	<input type="text"/>	Disabled ▼
Key 4: <input type="radio"/>	<input type="text"/>	Disabled ▼

Save

11. perkraukite maršruto parinktuvą (atjunkite maitinimo blokelį).