


TP-Link TL WR741ND

1. Internetinio adreso lauke įveskite 192.168.0.1 (jei nebuvo pakeista kitokiu);



2. į abu laukelius „User Name“ ir „Password“ įveskite žodį **admin**. Pateksite į maršruto parinktuvo nustatymus;

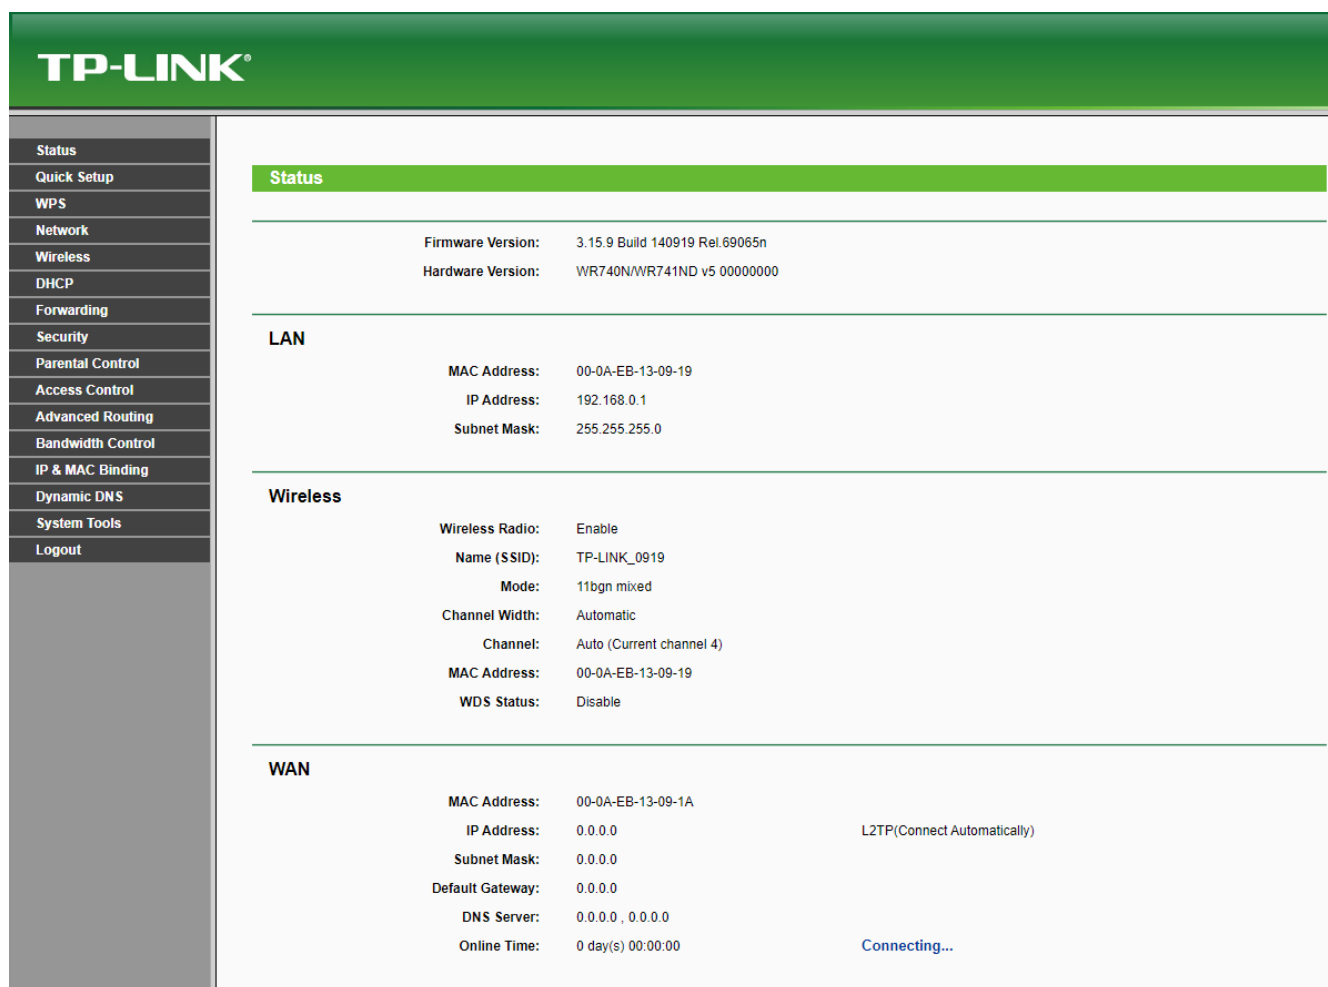

The screenshot shows the TP-Link web interface. On the left is a navigation menu with the following items: Status, Quick Setup, WPS, Network, Wireless, DHCP, Forwarding, Security, Parental Control, Access Control, Advanced Routing, Bandwidth Control, IP & MAC Binding, Dynamic DNS, System Tools, and Logout. The main content area is titled "Status" and is divided into three sections: LAN, Wireless, and WAN.


Status	
Firmware Version:	3.15.9 Build 140919 Rel.69065n
Hardware Version:	WR740N/WR741ND v5 00000000

LAN	
MAC Address:	00-0A-EB-13-09-19
IP Address:	192.168.0.1
Subnet Mask:	255.255.255.0

Wireless	
Wireless Radio:	Enable
Name (SSID):	TP-LINK_0919
Mode:	11bgn mixed
Channel Width:	Automatic
Channel:	Auto (Current channel 4)
MAC Address:	00-0A-EB-13-09-19
WDS Status:	Disable

WAN		
MAC Address:	00-0A-EB-13-09-1A	
IP Address:	0.0.0.0	L2TP(Connect Automatically)
Subnet Mask:	0.0.0.0	
Default Gateway:	0.0.0.0	
DNS Server:	0.0.0.0, 0.0.0.0	
Online Time:	0 day(s) 00:00:00	Connecting...

3. kairėje meniu pusėje pasirinkite „Wireless“;

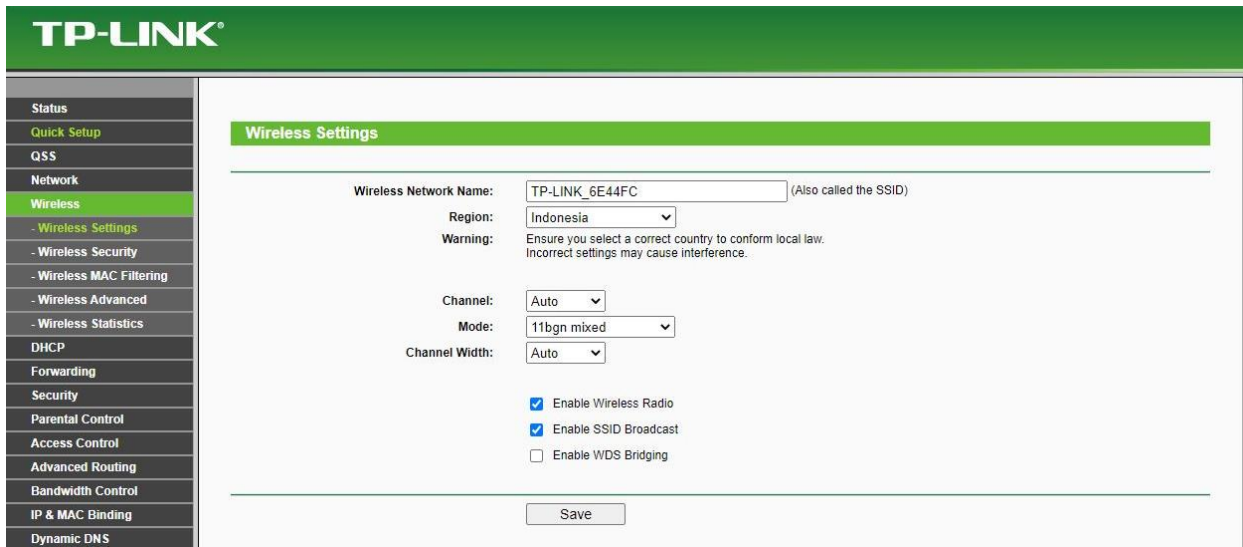


The screenshot shows the TP-LINK web interface. On the left is a navigation menu with 'Wireless' selected. The main content area is titled 'Wireless Settings'. It contains the following fields and options:

- Wireless Network Name: TP-LINK_6E44FC (Also called the SSID)
- Region: Indonesia
- Warning: Ensure you select a correct country to conform local law. Incorrect settings may cause interference.
- Channel: Auto
- Mode: 11bgn mixed
- Channel Width: Auto
- Enable Wireless Radio:
- Enable SSID Broadcast:
- Enable WDS Bridging:
- Save button

4. paspauskite „Wireless security“ , o atsidariusiame lange pasirinkite „WPA/WPA2 – Personal (Recommended)“;

5. laukelyje „Wireless Password“ įrašykite savo sugalvotą slaptažodį. Paspauskite „Save“;

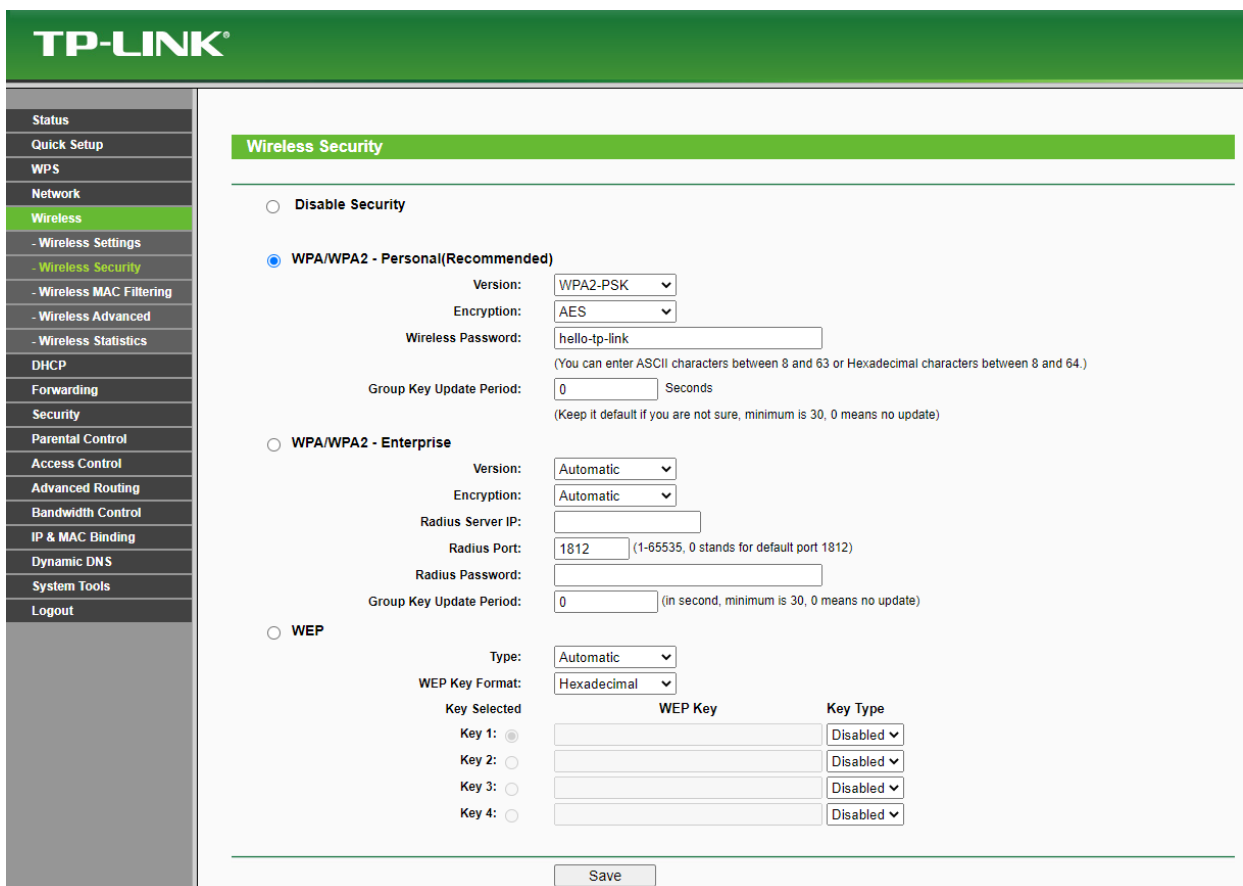

The screenshot shows the TP-LINK web interface. On the left is a navigation menu with 'Wireless Security' selected. The main content area is titled 'Wireless Security'. It contains the following options and fields:

- Disable Security:
- WPA/WPA2 - Personal(Recommended):
 - Version: WPA2-PSK
 - Encryption: AES
 - Wireless Password: hello-tp-link (You can enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)
 - Group Key Update Period: 0 Seconds (Keep it default if you are not sure, minimum is 30, 0 means no update)
- WPA/WPA2 - Enterprise:
 - Version: Automatic
 - Encryption: Automatic
 - Radius Server IP: [empty]
 - Radius Port: 1812 (1-65535, 0 stands for default port 1812)
 - Radius Password: [empty]
 - Group Key Update Period: 0 (in second, minimum is 30, 0 means no update)
- WEP:
 - Type: Automatic
 - WEP Key Format: Hexadecimal
 - Key Selected: Key 1 (selected), Key 2, Key 3, Key 4
 - WEP Key: [empty]
 - Key Type: Disabled
- Save button

6. perkraukite maršruto parinktuva (atjunkite maitinimo blokelį).